



Effective October 5, 2011

CC6400

STANDARD VOC CLEAR

Description

2-component clear based on Low Emission resin technology, to be used in clear over base system.
Composition based on acrylic copolymer and a unique, patented "star" polymer technology.

Products

| | |
|--------|-----------------------------|
| CC6400 | Standard VOC Clear |
| XK203 | Low Emission Activator Fast |
| XK205 | Low Emission Activator |
| XK206 | Low Emission Activator Slow |
| AZ9100 | Performance Agent |

Properties

- Combines very easy application with little sagging risks.
- Gives a smooth, high build finish.
- Has an efficient drying performance.
- Has excellent mar, chemical and weather resistance.
- Can be used for spot, panel and overall repair.
- VOC compliant, conform with directive 2004/42/EC.

Substrates

- DuPont Refinish basecoats.
- All cleaned and sanded OEM and cured repair finishes (not recommended on thermoplastic acrylic finishes)











Effective October 5, 2011

CC6400

STANDARD VOC CLEAR

PRODUCT PREPARATION

| | | | | | | | | |
|---|----------------------------------|--|-----------------------|----------------------|---|--------|-------------------------|--------|
|  | Mixing ratio | | Spot and panel | | Standard | | High temperature | |
| | | | Volume | Weight | Volume | Weight | Volume | Weight |
| | | CC6400 | 3 | 100 | 3 | 100 | 3 | 100 |
| | | XK203 | 1 | 36 | - | - | - | - |
| | | XK205 | - | - | 1 | 36 | - | - |
| | XK206 | - | - | - | - | 1 | 36 | |
| | AZ9100 | 0.2 | 6 | 0.2 | 6 | 0.2 | 6 | |
| | VOC | 420 g/l | | | | | | |
|  | Pot life at 20°C | XK203 | 1 hr | | | | | |
| | | XK205 | 1 hr 15 min | | | | | |
| | | XK206 | 1 hr 15 min | | | | | |
|  | Spray viscosity at 20°C | DIN 4 | 19-22 s | | | | | |
| | | FORD 4 | 20-23 s | | | | | |
| | | AFNOR 4 | 22-25 s | | | | | |
|  | Spray equipment | | Fluid tip | Distance | Pressure | | | |
| | Conventional guns | | | | | | | |
| | Gravity feed | | 1.4-1.6 mm | 15-20 cm | 3-4 bar | | | |
| | Suction feed | | 1.6-1.8 mm | 15-20 cm | 3-4 bar | | | |
| | Pressure feed | | 1.0-1.2 mm | 15-20 cm | 3-4 bar | | | |
| | Compliant guns (HVLP/HTE) | | | | | | | |
| | Gravity feed | | 1.2-1.4 mm | 10-15 cm | According to supplier's specifications | | | |
| | Suction feed | | 1.5-1.6 mm | 10-15 cm | | | | |
| | Pressure feed | | 1.0-1.2 mm | 10-15 cm | | | | |
|  | Number of coats | 2 (1.5) | | | | | | |
|  | Flash time | 5-10 min between coats when applying 2 coats 0-3 min between coats when applying 1.5 coats 0-5 min before bake | | | | | | |
| | DFT | 50-80 μ | | | | | | |
|  | Drying | | XK203 | XK205 | XK206 | | | |
| | | | 25 min x 60°C | 30 min x 60°C | 35 min x 60°C | | | |
| | Dust-free | | imm. | imm. | imm. | | | |
| | Dry to handle | | 10 min | 10 min | 25 min | | | |
| | Tape-free | | 1 hr | 1 hr | 2 hr | | | |
|  | IR drying* | Flash time | 5 min | | * Guideline for short/medium wave IR equipment. | | | |
| | | Distance | 80 cm | | | | | |
| | | Half power | 5 min | | | | | |
| | | Full power | 15-20 min | | | | | |
| <p>This data relates only to the material designated herein and does not apply to use in combination with any other material or any process. The data is not to be considered as a warranty or quality specification and we assume no liability in connection with its use.</p> | | | | | | | | |



Effective October 5, 2011

CC6400

STANDARD VOC CLEAR

RECOMMENDED USE

Surface preparation

1. Clean surface with water and soap. Rinse and dry.
2. Degrease with a correct DuPont Refinish preparatory cleaner.
Wipe dry with a clean cloth.
3. Repair according to damage.
4. Degrease with a correct DuPont Refinish final cleaner/degreaser.
Wipe dry with a clean cloth.
5. Tack rag.
6. If needed, apply a DuPont Refinish basecoat.

Clearcoat application

When the DuPont Refinish basecoat is completely flat, apply CC6400 in 2 coats with 5-10 min flash between coats or apply 1 light coat immediately followed by a full coat with 0-3 min flash between coats.

Chemical resistance

When fully cured, CC6400 is resistant to short exposures of the chemicals as listed:

| | | |
|-------------------|------|---------------------|
| sodium hydroxide | 20 % | battery acid |
| sulphuric acid | 25 % | toluene |
| hydrochloric acid | 20 % | xylene |
| phosphoric acid | 20 % | glycol |
| Ammonia | 10 % | brake fluid, petrol |

Equipment cleaning

Use a correct DuPont Refinish solventborne gunwash.



Effective October 5, 2011

CC6400

STANDARD VOC CLEAR

RECOMMENDED USE (con'd)

Recoatability

At any time after tape-free time. After 24 hr, scuff sanding is required.

Remarks

- XK203 is recommended for spot repair only and not for use on horizontal parts.
- Close can of activator tightly immediately after use, as this product will react with humid air and water and lose its hardening effect.
- Activated material should not be returned to original can of non-activated material.
- To spray interiors, use of XK203 is recommended.
- Dry spray spots in the clear can be worked off with AK350 at very low spray pressure. This should be done at the latest 5 min after clear application and should be avoided on horizontal parts.
- For mixing rod information, see specific TDS.
- Material has to be at room temperature (18-25°C) before use.

Product data

Package viscosity: 95-115 cp

Theoretical coverage: 6-10 m²/l at recommended DFT - ready-to-spray

Directive 2004/42/EC: 2004/42/IIB(d)(420)420: The EU limit value for this product (product category: IIB(d)) in ready to use form is maximum 420 g/l of VOC. The VOC content of this product in ready to use form is maximum 420 g/l.

| Products | Packages (l) | Shelf life at 20°C (year) | Density (kg/l) |
|----------|-----------------|------------------------------|-------------------|
| CC6400 | 5 | 4 | 0.984 |
| XK203 | 1 - 5 | 3 | 1.060 |
| XK205 | 1 - 5 | 3 | 1.059 |
| XK206 | 1 - 5 | 3 | 1.078 |
| AZ9100 | 1 | 2 | 0.829 |

Safety

Consult Safety Data Sheet prior to use. Observe the precautionary notices displayed on the container.



Effective October 5, 2011

CC6400

STANDARD VOC CLEAR

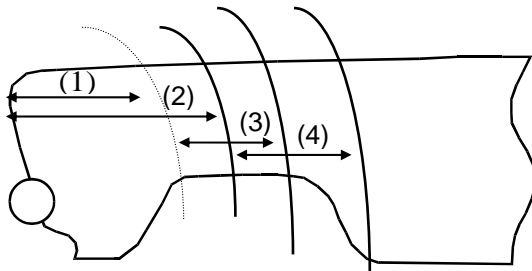
REPAIR SYSTEMS

Overall repair

Pay attention to the application method. Spray procedure has to ensure proper overspray melt-in which is achieved within 2 min of the clear application. Plan the process to avoid dry overspray.

Spot repair: AK350 Fade-out Thinner method

- (1) Apply 1 coat of CC6400 over the basecoat, extending into the area surrounding the spot.
 - (2) Apply a 2nd coat of CC6400, extending further into the area surrounding the spot.
 - (3) Smoothen out the fade-out area with AK350 within 5 min maximum.
 - (4) Optionally extend the fade-out area with AK350 within 5 min maximum.
- ! Surface should be carefully and correctly prepared before the basecoat application. See recommended use, paragraph surface preparation.
- ! Stay with the application of AK350 within the prepared area.



If necessary, balance out the gloss level by polishing with a non silicone containing polishing compound or a non silicone containing final glaze, after complete hardening of the repair.

Copyright © 2011 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E. I. du Pont de Nemours and Company or its affiliates.